


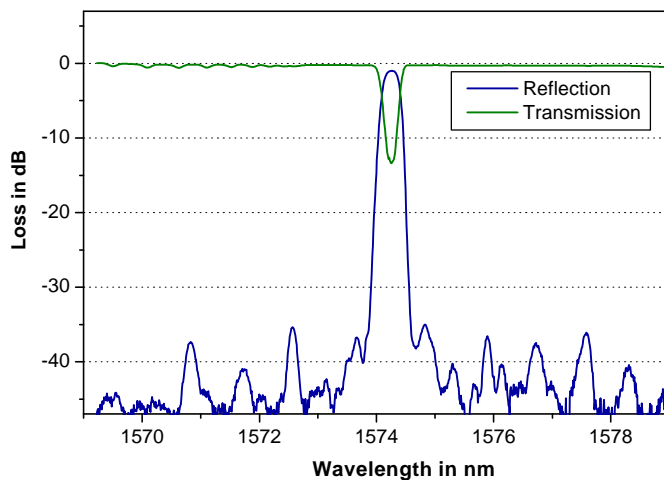
Stabilized Bragg Grating

Applications	Options	Package
<ul style="list-style-type: none"> Wavelength standard Optical communications Fiber lasers DWDM applications Add-Drop-Multiplexers Reference for FBG sensors 	<ul style="list-style-type: none"> Various connectors With circulator Table top or 19" module Custom filter function (Please ask for the specification sheet) Phase shifted gratings 	

Specification

	Premium	Standard
Center Wavelength [nm]	850 .. 1600	1300 .. 1330, 1410 1510 .. 1610
Linewidth (FWHM) [nm]		custom
Reflectivity [%]		custom
SNR @Peak ±1nm [dB]	<30	<25
Stability [pm]	+/-0.1	+/-0.3
Temperature Range		0..60°C
Connector	FC/PC, FC/APC, ST, SC, SC/APC, DIN	

Spectral Characteristics (Example)



Dimensions (table top)

